

Digital B/W Cameras

III PS 4 – 285 | 274 | 205 | 1020 GigE



The digital PS cameras have been designed especially for software integration.

The matching Kappa sdk3 offers a state-of-the-art software environment based on .net and C-API. In combination with the sdk or a detailed interface description the PS cameras convince as high-performance components in all measuring and testing machines.

The camera series is based on variable camera electronics, low power consumption and advanced circuitry, providing both an extremely rugged design and excellent signal quality.

The user can choose from a range of high-quality CCD sensors with megapixel resolution by Sony and Kodak.

As standard the series comes in a block housing, but for the individual touch it is also available in a striking hexagonal design housing.

The digital Kappa camera systems comply with the highest standards and offer outstanding Kappa-specific technological highlights, such as rugged design, excellent highly linear signal quality, extraordinary signal-to-noise ratio, long-time exposure and, optionally, a second serial interface with bespoke configuration of functions. High frame rates are achieved by binning and partial scan, while the image size remains freely adjustable.

GigE

Digital camera
Black-and-white
GigE
12 bit digital signal processing
Progressive scan
Megapixel resolution
Up to 30 fps (2 fold binning)
External trigger, reset/restart
Partial scan Binning
Gamma correction
Automatic functions
Long time integration
Cooled camera
PS 4C – 285 GigE

realize visions .

Technical Data

Sensor-specific data

II PS 4 – 285 GigE | PS 4C – 285 GigE

CCD sensor	2/3" interline transfer CCD progressive scan with micro lenses (Sony ICX285AL, EXview HAD)
Pixel size (H x V)	6.45 μm x 6.45 μm
Light-sensitive area (H x V)	8.93 mm x 6.66 mm
Number of pixels (H x V)	1434 x 1050, total
Spectral sensitivity (without IR-filter)	320 nm - 1100 nm
Full well capacity	23 000 e^-
A/D-conversion factor	5.6 e^- / increment
Dynamic range	63 dB (measured in dark image, at 66 ms exposure time and 0 dB gain)
Sensitivity	(measured at 18 dB gain, gamma = 1, and 50 % level, 3000 K) 0.02 lx at 100 ms exposure time 0.000017 lx at 120 s exposure time 0.0000017 lx at 20 min exposure time (cooled camera PS 4C – 285 GigE)

II PS 4 – 274 GigE

CCD sensor	1/1.8" interline transfer CCD progressive scan with micro lenses (Sony ICX274AL, EXview HAD)
Pixel size (H x V)	4.40 μm x 4.40 μm
Light-sensitive area (H x V)	8.50 mm x 6.80 mm
Number of pixels (H x V)	1688 x 1248, total
Spectral sensitivity (without IR-filter)	320 nm - 1100 nm
Full well capacity	5 500 e^-
A/D-conversion factor	1.3 e^- / increment
Dynamic range	56 dB (measured in dark image, at 115 ms exposure time and 0 dB gain)
Sensitivity	(measured at 18 dB gain, gamma = 1, and 50 % level, 3000 K) 0.05 lx at 100 ms exposure time 0.000042 lx at 120 s exposure time

II PS 4 – 205 GigE

CCD sensor	1/2" interline transfer CCD progressive scan with micro lenses (Sony ICX205AL, EXview HAD)
Pixel size (H x V)	4.65 μm x 4.65 μm
Light-sensitive area (H x V)	7.6 mm x 6.2 mm
Number of pixels (H x V)	1434 x 1050, total
Spectral sensitivity (without IR-filter)	320 nm - 1100 nm
Full well capacity	12 000 e^-
A/D-conversion factor	2.9 e^- / increment
Dynamic range	55 dB (measured in dark image, at 66 ms exposure time and 0 dB gain)
Sensitivity	(measured at 18 dB gain, gamma = 1, and 50 % level, 3000 K) 0.04 lx at 100 ms exposure time 0.000033 lx at 120 s exposure time

II PS 4 – 1020 GigE

CCD sensor	2/3" interline transfer CCD progressive scan with micro lenses (Kodak KAI 1020 M)
Pixel size (H x V)	7.4 μm x 7.4 μm
Light-sensitive area (H x V)	7.4 mm x 7.4 mm
Number of pixels (H x V)	1028 x 1008, total
Quantum efficiency	max. 42% at 490 nm
Spectral sensitivity (without IR-filter)	320 nm - 1000 nm
Full well capacity	42 000 e^-
A/D-conversion factor	10.3 e^- / increment
Readout noise	50 e^- rms
Dynamic range	60 dB (measured in a dark image, at 33 ms exposure time and 0 dB gain)
Sensitivity	(measured at 18 dB gain, gamma = 1, and 50 % level, 3000 K) 0.06 lx at 100 ms exposure time 0.00005 lx at 120 s exposure time

Technical Data

Interface-specific data

II PS 4 – 285 GigE | PS 4C – 285 GigE

Camera output format	full frames:	1434 x 1050 pixels	15 fps	
	binning:	2 fold	4 fold	8 fold
	image size (pixels):	717 x 525	358 x 262	179 x 131
	frame rate :	25 fps	41 fps	62 fps
	partial scan:	image size freely adjustable		
Exposure	manual:	1 μ s to 120 s (cooled: up to 20 min)		
	automatic (AE):	1 μ s to 66 ms at 1280 x 960 pixels		
Power supply	9-36 V DC, 2.6 W			

II PS 4 – 274 GigE

Camera output format	full frame:	1688 x 1248 pixels	12 fps	
	binning:	2 fold	4 fold	8 fold
	image size (pixels):	844 x 624	422 x 312	211 x 156
	frame rate :	15 fps	26 fps	40 fps
	partial scan:	image size freely adjustable		
Exposure	manual:	1 μ s to 120 s		
	automatic (AE):	1 μ s to 115 ms at 1600 x 1200 pixels		
Power supply	9-36 V DC, 2.6 W			

II PS 4 – 205 GigE

Camera output format	full frame:	1434 x 1050 pixels	Mono 16	11 fps
	binning:	2 fold	4 fold	8 fold
	image size (pixels):	717 x 525	358 x 262	179 x 131
	frame rate:	25 fps	41 fps	62 fps
	partial scan:	image size freely adjustable		
Exposure	manual:	1 μ s 120 s		
	automatic (AE):	1 μ s to 66 ms at 1280 x 960 pixels		
Power supply	9-36 V DC, 3 W			

II PS 4 – 1020 GigE

Camera output format	full frame:	1028 x 1008 pixels	Mono 16	16 fps
	binning:	2 fold	4 fold	8 fold
	image size (pixels):	514 x 504	257 x 252	128 x 126
	frame rate:	36 fps	60 fps	90 fps
	partial scan:	image size freely adjustable		
Exposure	manual:	1 μ s to 120 s		
	automatic (AE):	1 μ s to 33 ms at 800 x 600 pixels		
Power supply	9-36 V DC, 2.9 W			

Signal processing | Development tools


Development tool	software development kit, Kappa sdk3 (.Net-class library/C-function library, API) order-no.: 771-5757
System	12 bit digital
Gain	manual/automatic (AGC): 0 to 18 dB
Enhancement	contrast: 1.0 to 8.0 fold
	brightness: subtraction, 0 to 4095 LSB, max. 50% of the output level
	edge: adjustable
Gamma	0.3 to 2.2
Diagnostics	camera name, serial number, revision number, temperature of sensor and camera, built-in test image size, frame rate, test pattern
Line generator	2 reticles: position, color and style adjustable
Measuring window	position and size adjustable
Synchronization	intern/extern, reset/restart (delay < 10 μ s)
Hardware Trigger	Minimum trigger delay 4.2 μ s - 8.2 μ s depending on the sensor type Frame on Demand
Software Trigger	via SDK 3

General Technical Data


Interfaces	GigE connector, system connector (power supply, additional RS 232, control and trigger signals)
Lens mount	C-mount, focal plane adjustable, CS-mount on request
Filter	IR-filter, removable
Temperature	operating temperature -20°C to +60°C, storage temperature -30°C to +70°C
Dimensions Weight	block housing: 65 x 65 x 56 mm; 320 g cooled camera: 73 x 69 x 116 mm; 905 g
System requirements	hardware: GigE connector, minimum 1.8 GHz, minimum 512 MB RAM, DirectX9-enabled graphics card with at least 64 MB operating system: Microsoft Windows 2000 ®, Microsoft Windows XP ® (32 Bit Edition)
Cable length	Ethernet (minimum CAT5) up to 100 m
Order no. block housing	PS 4-285 GigE 953-1735 PS 4-274 GigE 953-1736 PS 4-205 GigE 953-1737 PS 4-1020 GigE 953-1706
Order no. cooled camera	PS 4C-285 GigE 953-1738
Standard equipment:	camera
In addition for cooled version	power supply ACC 2 (incl. control cable 4 m and power supply cable)

Spectral Sensitivity Characteristics (without IR-filter)


III PS 4 – 285 GigE

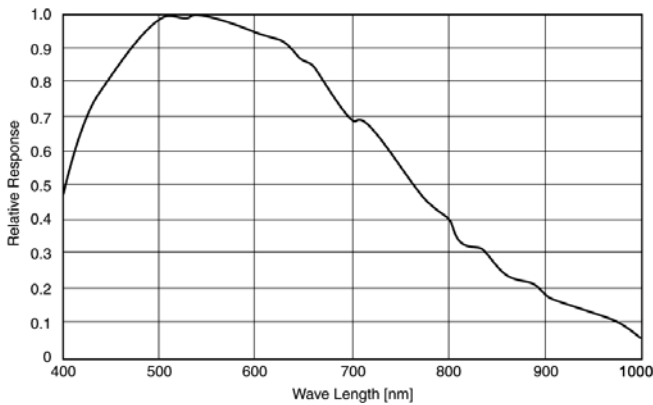


III PS 4 – 205 GigE

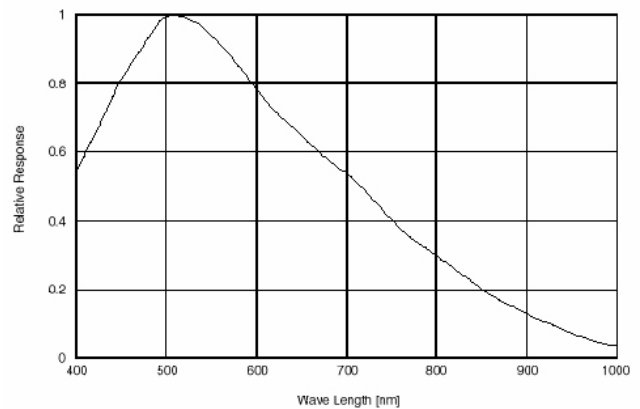

III PS 4 – 274 GigE

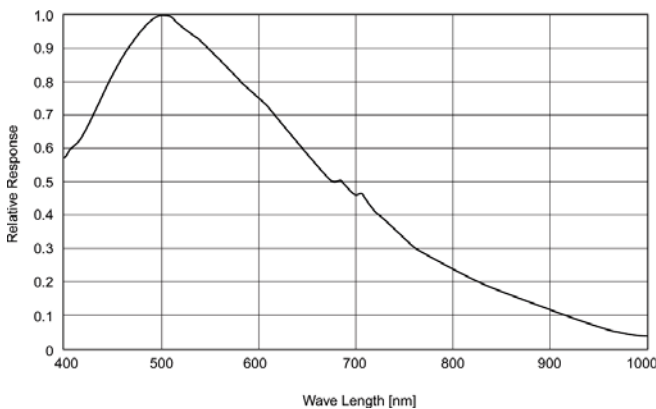

III PS 4 – 1020 GigE

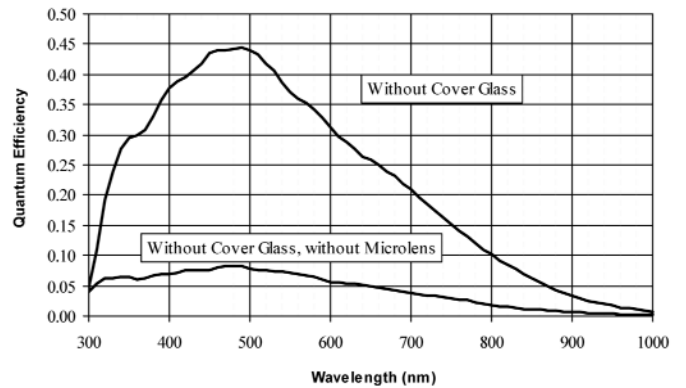

We are constantly checking the accuracy of the technical data. We are prepared to provide more detailed information on request. Technical data are subject to change without notice!